

CLOUD

Description:

Formed steel pendant with 1/2" bottom return with direct down illumination, suspended with aircraft cables pitched to a center canopy.

Sizes:

CLD-24: 24" W x 6" H

CLD-30: 30" W x 6" H

CLD-36: 36" W x 6" H

Delivered lumens in gloss white 4000k

CLD-24-LPPD1, 33 watts ,2767 lumens

CLD-30-LPPD1x2 67 watts 5627 lumens

CLD-36 LPPD1X2 67 watts 5627 lumens

Mounting Options:

CS-CSF-CBL: Cables run diagonally to center mounted canopy

Finishes:

Available in any one of the standard finishes below or in any specified RAL

Top Diffuser:

Powder coated aluminum

Bottom Diffuser:

White acrylic

Driver Location:

In surface mounted 8.5W x 1.25" H canopy

Power Feed:

10 feet of white power feed cord

Supports:

(3) 8 ft 3/64" stainless steel aircraft cables

Hardware finish:

Satin nickel canopy and aircraft grip locking mechanisms

Fabrication:

Cloud is fabricated in the U.S.

Certification:

UL listed LED indoor

Component replacement:


Field replaceable

Warranty:

Electronic manufacturer's 5 year extended limited

IES files

Available on request

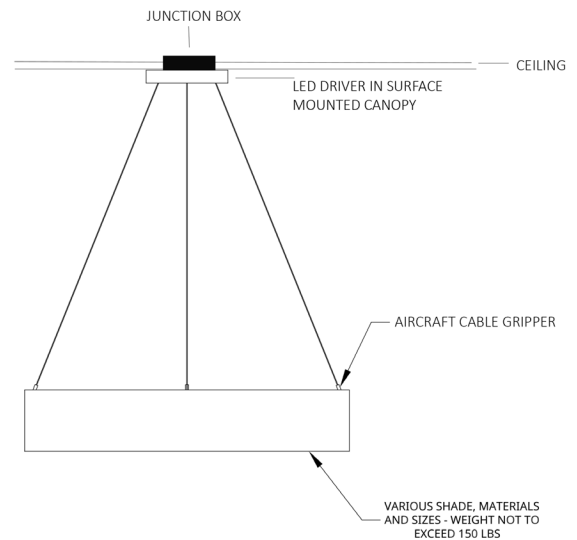

CS-CSF-CBL

STANDARD POWDERCOATED FINISHES



ORDER KEY

Model	Size	Finish	LED System	Mounting	Color Temp
CLD	24	Specify	LPPD1- 800	CS-CSF-CBL	2700
	30		LPPD1X2-1600		3000
	36		LPPD1X2-1600		3500
			4000		