

# EOS

**Description:**

All acrylic circular ring fabricated in modular sections assembled with ease on location. 36" diameter fixtures are fabricated in 3 sections. 48" to 96" fixtures are fabricated in 4 sections. 120 inch fixtures are fabricated in 6 sections.

**Body:**

Highly durable and clean able acrylic. Unless otherwise specified EOS is fabricated in white acrylic with no decorative perimeter accent.

**Illumination:**

450 lm/ linear foot: Illuminates the outer perimeter of the fixture.

900 lm/ linear foot: Illuminates the inner and outer perimeter of the fixture

**Body Dimension:**

6" W by 8" H

LED: Flexible led sheeting available in 3700K, 3000K 3500K and 4000K

**Drivers:**

120-277V input , 0-10 V dimming.

**Mounting options:**

VS-CSF-CBL: Aircraft cables run vertically to the ceiling.Driver in surface mounted canopy

CS-CSF-CBL: Aircraft cables run diagonally to center mounted canopy. Available to 60"

VS-RM-CBL: Aircraft cables run vertically .Driver located in NEMA enclosure above ceiling

**Perimeter options:**

WA: White Acrylic

CA; Color

DP: Digital print

WV: Wood veneer

**Power Cord:**

10 feet of clear power cord/s

**Component replacement**

Field replaceable

**Electronic warranty:**

Electroni manufacturer's extended 5 year limited warranty

**Listing:**



UL listed indoor

**IES files:**

Available on request




Above Image: 120" EOS  
Below Drawing: EOS 120 VS-RM-CBL

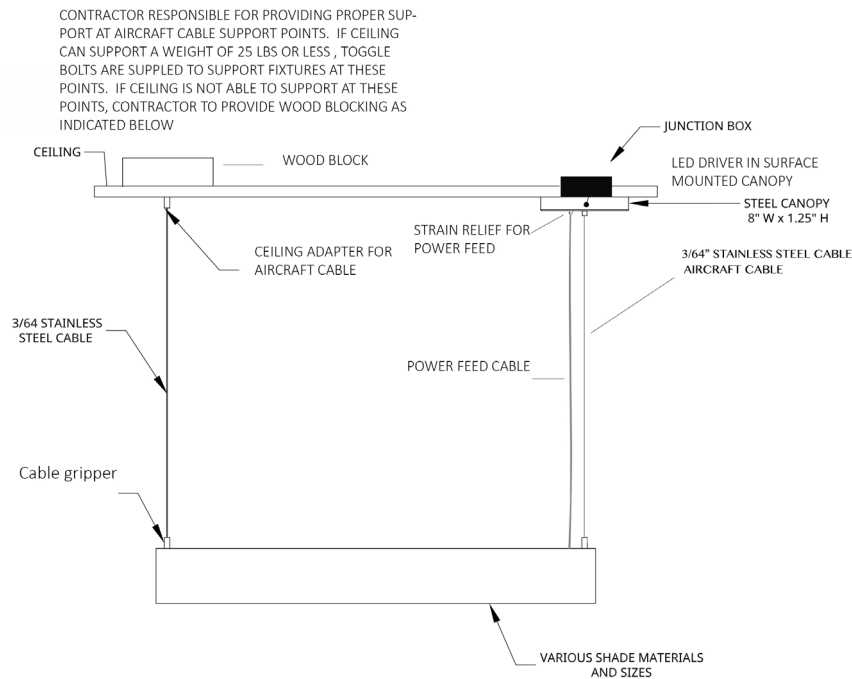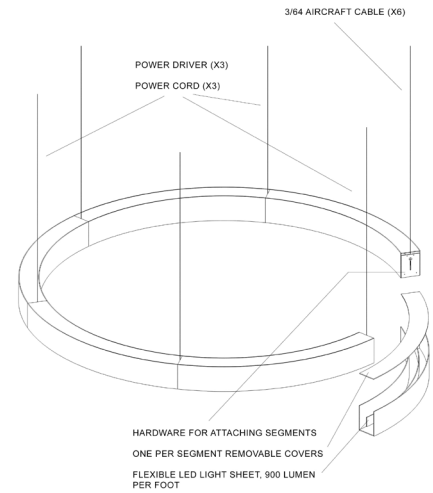


## VS-CSF-CBL

CONTRATOR RESPONSIBLE FOR PROVIDING PROPER CEILING SUPPORT AT AIRCRAFT CABLE SUPPORT POINTS. TOGGLE BOLTS PROVIDED WHERE CEILING CAN SUPPORT 25 OR LESS POUNDS. IF CEILING CAN NOT SUPPORT 25 LBS, WOOD BLOCKS AT SUPPORT POINTS ARE REQUIRED AS SHOWN IN THIS DRAWING

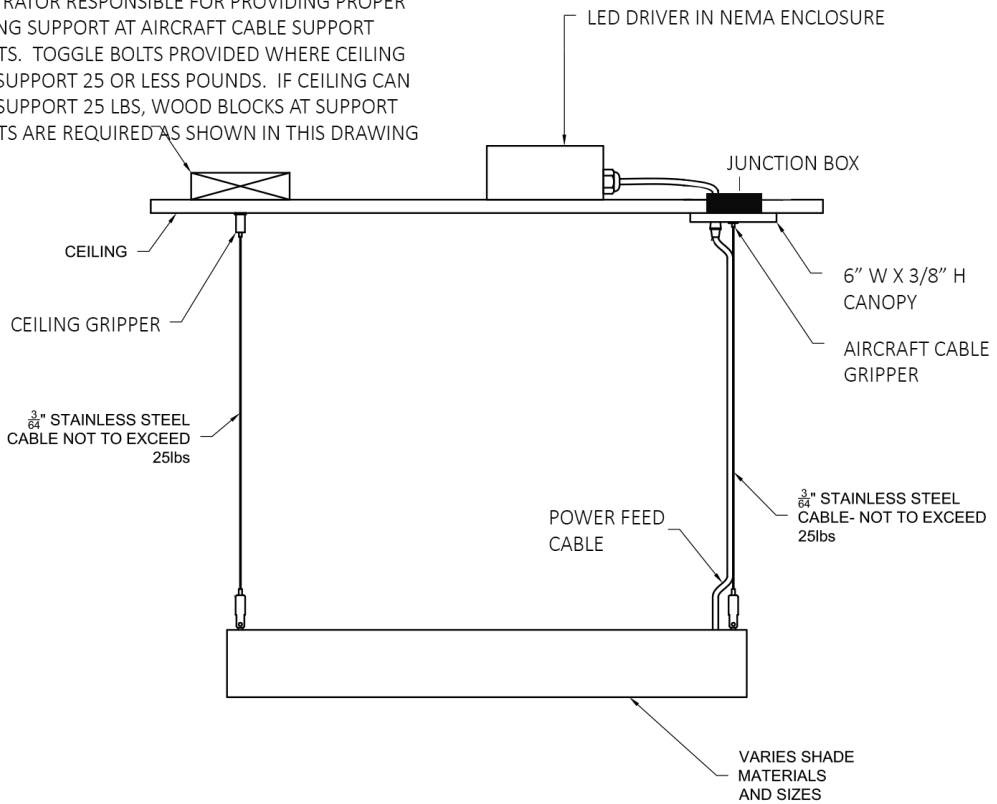


## VS-RM-CBL

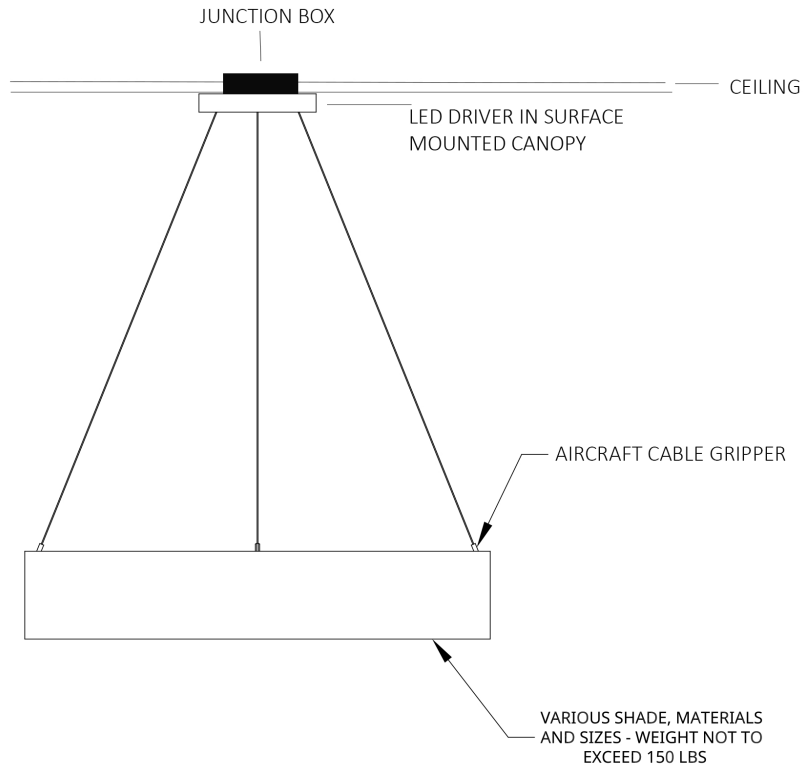


## CS-CSF-CBL


## DIGITAL PERIMETER OPTIONS




Aqua Micro




Blue Micro




Beige Micro




Brown Micro




Gold Micro




Gray Micro



Green Micro



Orange Micro



Red Micro




Yellow Micro

## NATURAL WOOD VENEER PERIMETER OPTIONS




Light Aspen Gray




Mahogany



Douglas Fir



Oak



Poplar

## ORDER KEY

Model	Perimeter	Illumination	Color	Mounting	Delivered	Wattage	Deliverd	Wattage
	Option		Temp.	Option	lumens	450	lumens	
					450		900	
EOS-36	WA	450	2700	VS-CSF-CBL	3360	37	6720	74
EOS-48	white acrylic		3000		4320		8640	92
EOS-60	DP digital print	900	3500	CS-CSF-CBL	5200	59	10400	118
EOS-72			VS-RM-CBL	6480	12960		144	
EOS-96			8640	17280	196			
EOS-120			11330	22336	248			
	NO							
	Natural overlay							
	CA							
	Ccolored acrylic							