

## **Beta**



ı	PART NUMBER:								
-	TYPE:					JOB NAME:			
						Ţ,			
ORDE	RING	INF	ORI	MAT	ПΟ	Ν			
MODEL* & SIZE					(	2 COLOR TEMP.			
BETA-06	26" Length				<b>3000</b> 3000K				
BETA-0	<b>644</b> 48" Length					<b>3500</b> 3500K			
BETA-0	658	62" Ler	ngth				<b>4000</b> 4000K		
CRI	3 CRI					4 WATTAGE			
80 80 CRI (Standard)							18	18 Watts	
							32	32 Watts	
<b>90</b>							42	42 Watts	
6 MOUI	1/08 8″ 0 1/08 8″ 0 1/06 6″ 0	OPTIC Canopy Canopy Canopy	ONS with [ with [ with F	Oriver, : Oriver, Remote	Cable e Driv	e mo	ounted stem i		
7 COLO	R COD	E							
BKG	Gloss Black								
BKS	Satin Black								
BRZ	Bronze								
WHG	Gloss White								
WHS	Satin White								
BLU	Blue								
GRN	Green								
GDS	Satin Gold								
CRD	Cardinal Red								
SLV	Silver								
RAL	RAL	RAL							
CUS	CUSTOM								



## **SPECIFICATIONS**

**SIZES:** 6" Wide. 25, 47 and 62" lengths

**CONSTRUCTION:** Acrlic tube mounted to rigid metal cover and

suspended to Canopy. LED driver is mounted in canopy or can be remote mounted in enclosure. Optional bottom cap available. Cover and canopy finished in

durable powder coated finish.

**DIFFUSERS:** Precision cut acrylic lens eliminates any LED pixelation and

provides smooth symmetric distribution.

MOUNTING Optional configurations can be provided with a 36" stem or

**CONFIGURATIONS:** (1) 96' griplock cable and power cable to mount to canopy.

For longer lengths, please consult factory.

**DRIVERS:** LED drivers are 120-277V and 0-10V dimming. Drivers are

direct mounted in the canopy or optional remote

mounted (RM) driver in enclosure.

**LED**: LED's are mounted to metal surface to maximize heat

dissipation. Available in 3000, 3500 or 4000K.

Standard 80CRI, 90CRI optional.

**ILLUMINATION:** 25": 1,917 lumens at 18W

47": 3,374 lumens at 32W 62": 4,575 lumens at 42W

For other outputs and configurations, please consult factory

**FINISHES:** Powder coated finish applied to housing and canopies.

Available in a variety of powder coated finishes.


**FABRICATION:** Fabricated and assembled in the US.

**LISTINGS:** UL listed for dry or damp indoor locations.

**WARRANTY:** 5 year limited warranty on LED and electronic parts.

Consult terms and conditions for full details.

## RENDERINGS AND DIMENSIONS

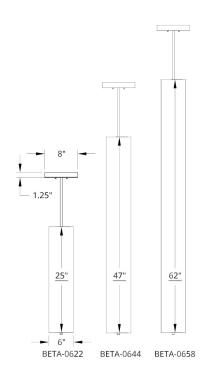



CBL CABLE SUPPORT